

For over 90 years, Taylor Cable Products have represented quality and customer satisfaction in the automotive and performance racing markets.

We are proud to have our Ignition Wire Sets firing some of the fastest race and street vehicles in the world. 8mm Spiro Pro, 8.2mm ThunderVolt, 8mm High Energy, 8mm StreeThunder, and 10.4mm 409 Series Ignition Wire Sets are a testimony to our commitment to innovation and development of highly functional ignition products.

What is the difference between Universal, Race Fit, and Custom Wire Sets?



Universal Wires Sets

- Extra-long wire sets with only one spark plug terminal and boots attached.
- End User cuts each wire to length and attaches distributor/coil terminal and boot
- All sets come with both HEI and Socket Style boots and terminals in the kit
- Other types of distributor/coil boot and terminal kits are available

Race Fit

- Each wire is cut to the exact length, ready to install, with boots and terminals on each end
- Lengths may not be correct if using fixed looms or running wires in an alternate path
- Extra-long coil wire is included, one end complete, the other end ready to cut and install the correct boot and terminal on your choice of high-performance coil

Custom

Custom Wires are designed to replicate your OE wire set. Each wire is cut to length
and booted to match OE wires. Lower resistance will get more fire to your spark plugs,
increased horsepower and torque, and improved fuel mileage.

How to shop Custom Ignition Wire Sets

- Choose the Ignition Wire Series that is best suited to your needs
 - 8mm Spiro Pro
 - 10.4mm Pro Race
 - 8.2mm ThunderVolt
 - 8mm StreeThunder
 - 8mm High Energy Ignition

Visit pertronixbrands.com and use "Find Your Perfect Part" to Search By Vehicle and enter Year, Make, Model, and Engine information to find your Ignition Wire application.





PERTRONIX PERFORMANCE BRANDS EMISSIONS CODES This Product is considered a Replacement Part per CARB and EPA regulations for emissions compliance and is legal for sale and use on specified vehicles in all 50 states as stated in Manufacturer's Application



PERTRONIX PERFORMANCE BRANDS EMISSIONS CODES
This Product is Certified by the Manufacturer as being a Non-Emissions
Related part per CARB and EPA regulations and therefore does not require emissions certification or CARB EO and is legal in all 50 states.

A control of the CARB and EA and the CARB EO and is legal in all 50 states.

A control of the CARB EO and is legal in all 50 states.






For Street & Strip, Off Road, Street Rod, and Custom Cars.

8mm Spiro Pro wires are engineered to deliver superior performance with unsurpassed quality.

They are the top choice amongst racers and enthusiasts alike with heat protection up to 600° F and 65,000 volts of dielectric strength.

- 8.0 mm Outer Silicone Jacket
 - Rated up to 65K Volts
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive stainless steel spiral wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos or pit radios
- Taylor low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in universal applications

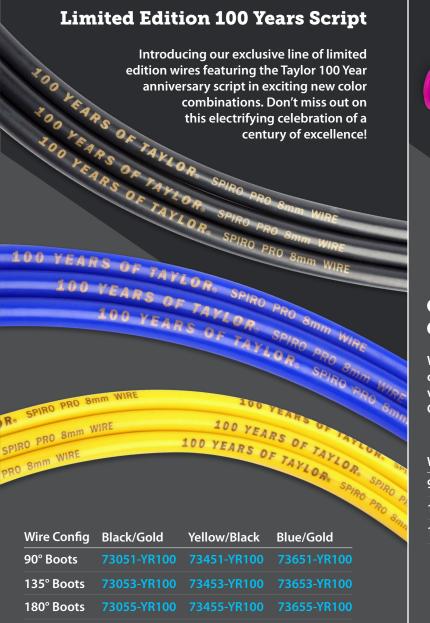

	Our Legendary Colors Are Back!	
C V	We're bringing back our legendary colored wires, now available in a ribrant array of Pink, Yellow, Orange, Green, Purple, and Gray/Black.	

Wire Config	Pink	Yellow	Orange	Green	Purple	Gray/Blk
90° Boots	78751	73451	78351	78551	73151	53851
135° Boots	78753	73453	78353	78553	73153	53853
180° Boots	78755	73455	78355	78555	73155	53855

Celebrate our 100th anniversary in style with Taylor Cable Products.







PIRO PRO 8mm WIRE

8mm

SPI


0

8mm Spiro Pro wires are engineered to deliver superior performance with unsurpassed quality.

They are the top choice amongst racers and enthusiasts alike with heat protection up to 600° F and 65,000 volts of dielectric strength.

For Street & Strip, Off Road, Street Rod, and Custom Cars

- 8.0 mm Outer Silicone Jacket
 - Rated up to 65K Volts
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive stainless steel spiral wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos or pit radios
- Taylor low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- · Available in Black Red and Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications





for Pull Strength

TAYLOR SPIRO PRO 8mm WIRE

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30 6 cyl - 46, 44, 42, 30, 28, 28, coil 36

8 cyl - 553, 53, 49, 49, 38, 38, 33, 33, coil 36

Street Hemi - 61, 56, 5, 47, 35, 30, 29, 29, coil 36

Wire Config	Cyl	Black	Red	Blue
180° Plug Boots	4	73035	73235	73635
90° Plug Boots	6	73047	73247	73647
180° Plug Boots	6	73045	73245	73645
90° Plug Boots	8	73051	73251	73651
135° Plug Boots	8	73053	73253	73653
180° Plug Boots	8	73055	73255	73655



LS UNIVERSAL IGNITION WIRES

- Perfect for coil relocation and custom header applications
- 36" Wires and multiple spark plug boot choices allow the perfect fit
- Spark Plug end is assembled
- · Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end



Wire Type	Wire Config	Black	Red
8mm Spiro Pro	90° Plug Boots		
8mm Spiro Pro	135° Plug Boots		
8mm Spiro Pro	180° Plug Boots		
409 Pro Race	135° Plug Boots		
8.2mm ThunderVolt	90° Plug Boots		
8.2mm ThunderVolt	180° Plug Boots		

8mm SPIRO PRO CERAMIC BOOT

- 8.0mm Ceramic Boots
- 350 ohms per foot
- Provide superior heat protection up to 2000 degrees
- · Highly conductive stainless steel spiral wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- · Universal fit sets will require cutting to fit, terminating, and booting the distributor end
- For RVs, Tow Vehicles and **High Heat Applications**



8 cyl - 53,53	,49,49,38,3	38,33,33,	coil 36
---------------	-------------	-----------	---------



Wire Config	Application	Black	Red
90° Plug Boots	Universal		
135° Plug Boots	Universal		
180° Plug Boots	Race Fit		
135° Plug Boots	Race Fit		
90° Plug Boots	Race Fit		
180° Plug Boots	Custom		
135° Plug Boots	Custom		

8.0mm TCW CORE PRO UNIVERSAL IGNITION WIRES

- 8.00mm Outer Silicone Jacket
- O ohms per foot resistance tin plated copper wire core (solid core)
- Heat resistant up to 600°
- · Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- Recommended for Vertex® Magneto or point type ignition
- Not recommended for applications with onboard electronics or electronic ignition
- · Universal fit sets will require cutting to fit, terminating, and booting the distributor end

Wire Config	Cyl	Black	Red	BLUE
90° Plug Boots	8			
135° Plug Boots	8			
180° Plug Boots	8			
331-426 Street Hemi	8			
90° Magneto	8			
180° Magneto	8			

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30 6 cyl - 46, 44, 42, 30, 28, 28 coil 36 8 cyl - 53, 53, 49, 49, 38, 38, 33, 33, coil 36 Street Hemi - 61, 56, 51, 47, 35, 30, 29, 29, coil 36 Magneto - 53, 53, 53, 53, 53, 53, 53, coil 18

8.0mm RESISTOR CORE PRO **UNIVERSAL IGNITION WIRES**

- 8.00mm Outer Silicone Jacket
- Heat resistant up to 600°
- 3500 ohms per foot resistor core
- · Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- · Eliminate RFI/EMI which can interfere with onboard electronics and stereos
- Not Recommended for CD ignitions
- · Universal fit sets will require cutting to fit, terminating, and booting the distributor end

Wire Config	Cyl	Black	Red	Blue
180° Plug Boots	6			
90° Plug Boots	8			
135° Plug Boots	8			
180° Plug Boots	8			

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30 6 cyl - 46, 44, 42, 30, 28, 28, coil 36 8 cyl - 53, 53, 49, 49, 38, 38, 33, 33, coil 36





YLOR



8mm High Energy wires are the perfect choice for the daily driver and meet the demands of today's high-tech ignitions and high under hood temperatures.

Taylor sets the standard in "High Energy" performance wire, available with a Resistor Core or Solid Core wire. The popular "Resistor Core" has less resistance than most OE wire conductors with little RFI interference while Solid Core is for racing applications where RFI is not a concern.

The perfect choice for the daily driver. OE Replacement

- 8.0 mm Outer Silicone Blend Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection throughout its lifetime
- 5000 ohms per foot resistor core
- Eliminates RFI /EMI which can interfere with onboard electronics and stereos
- Not recommended for CD ignitions
- High Temp Silicone Boots
- Double spring lock spark plug terminals
- Available in Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications





8mm StreeThunder wires feature a 500 ohm per foot resistance conductor wrapped in durable silicone blend double layer jacketing for heat protection, strength, and longevity.

> They are the top choice amongst racers and enthusiasts alike with heat protection up to 600° F and 65,000 volts of dielectric strength.

For Street & Muscle Cars

- 8.0 mm Outer Silicone Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection throughout its lifetime
- 500 ohms per foot
- Highly conductive stainless steel spiral wound core
- Eliminates RFI /EMI which can interfere with onboard electronics and stereos
- Silicone boots protect against high exhaust temperatures
- Double spring lock spark plug terminals
- Available in Black
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end

CABLE PRODUCTS

· Available in Universal, Race Fit and Custom applications



Firing America's Finest Rides Since 1923!



8.2mm ThunderVolt® wires outperform the competition in looks and performance at an affordable price.

For Street & Strip, Off Road, Street Rod, and Custom Cars

- 8.2 mm Outer Silicone Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 40 ohms per foot
- Highly conductive stainless steel spiral wound core
- RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- Silicone boots protect against high exhaust temps
- Double spring lock spark plug terminals
- · Available in Black, Red and Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications



Firing America's Finest Rides Since 1923!

CABLE PRODUCTS



10.4mm 409 Series Ignition Wires provide continuous heat protection up to 600° F and 102,000 volts of dielectric strength.

> 10.4mm 409 Series Ignition Wires provide continuous heat protection up to 600° F and 102,000 volts of dielectric strength. Each wire is constructed with a conductor, silicone core, and fiberglass wrapped in a silicone jacket.

> > Color coordinated silicone Pro Boots feature vibration proof double spring lock spark plug

For Drag Race, Circle Track, Off **Road or High Heat Applications**

- 10.4 mm Outer Silicone Jacket
- Rated up to 65K Volts
- Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive helically wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- Taylor low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- · Available in Black, Red and Blue
- · Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end

CABLE PRODUCTS





SPIRO PRO 8mm WIRE

TAYLOR

SPIRO PRO 8mm WIRE

SPIRO PRO 8mm

AYLO

Wire Type	Wire Config	Black	Red
8mm Spiro Pro	90° Plug Boots	73061	-
8mm Spiro Pro	135° Plug Boots	73063	-
8mm Spiro Pro	180° Plug Boots	73065	-
409 Pro Race	135° Plug Boots	79052	79252
8.2mm ThunderVolt	90° Plug Boots	83061	-
8.2mm ThunderVolt	180° Plua Boots	83065	_

8mm SPIRO PRO UNIVERSAL MOTORCYCLE WIRES

- 8.0mm Outer Silicone Jacket
- Rated up to 65K volts
- Heat resistant to 600°
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive stainless steel spiral wound core
- Taylor signature low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- Available in Black, Red, and Blue

Wire	Wire					TCW
Length	Config	Black	Red	Blue	Resistor	Black
24	90° Plug Boots	10051			10651	
24	135° Plug Boots	10053			-	
24	180° Plug Boots	10055			10655	
36	180° Pro Comp	10085			10685	

Year & Model	SERIES	Models	Boots	Wire Lengths	Black	Red	Blue
TOURING							
09-16 FL	Twin Cam	Road King, Electra Glide, Road Glide, Street Glide	135°	35" / 17"			
99-08 FL	Twin Cam F.I.	Road King, Electra Glide, Street Glide F.I.	180°	21" / 21"			
99-06 FL	Twin Cam Carb	Road King, Electra Glide, Street Glide Carb	180°	21.5" / 9"			
80-98 FLH	Evo	Electra, Road King, Street Glide	180°	21.5" / 9"			
65-79 FL		Road King, Electra Glide, Road Glide, Street Glide	90°	16" / 7"			
SUPER GLIDI	=						
99-07 FXD	Twin Cam	Dyna	90°	19" / 7"			
91-98 FXD	Evo	Dyna	90°	16" / 7"			
82-00 FXR	Evo	Super Glide	90°	12" / 12"			
65-85 FX		Super Glide, Dyna, FXR	90°	16" / 7"			
SOFTAIL							
08-17 FXC	Twin Cam	Softail Rocker or center mount Twin Cam Coils	135°	8" / 8"			
00-11 FL/FX	Twin Cam	Softail (except Rocker)	90°	19" / 7"			
89-99 FL/FX	Evo	Softail	90°	16" / 7"			
SPORTSTER							
07-18 XL	Evo	Sportster	180°	21.5" / 9"			
04-06 XL	Evo	Sportster (except XL1200S Model w/4 wires	180°	21" / 21"			
86-03 XL	Evo	Sportster (except XL1200S Model w/4 wire	180°	21.5" / 9"			
65-85 XL	Ironhead	Sportster	90°	16" / 7"	10030		
VICTORY	V-Twin	All (overant Ostone)	1000	24 // 22 //	10063	10262	
08-17	v-iwin	All (except Octane)	180°	21" / 20"	10063	10263	





BATTERY PRODUCTS

ALUMINUM BATTERY BOXES

100 Series (fits most battery sizes), Optima and Odyssey



OPTIMA BATTERY BILLET ALUMINUM TRAYS

Upgrade the look of your Optima Battery to a full, custom look



BATTERY CABLE KITS

Premium Copper Wire delivering more cranking power



BATTERY CABLE TERMINAL KITS

Tin plated copper compression battery cable terminals designed for fast and easy installation



BATTERY CABLE GROUNDING KITS

Track tested and proven to add horsepower while properly grounding engines



GROUNDING STRAPS

4-Gauge Tinned Copper Wire



TRUNK MOUNT BATTERY RELOCATION KITS

Kits for multiple applications to provide better weight distribution for imrpoved traction



IGNITION WIRE ACCESSORIES

SPARK PLUG BOOTS & TERMINALS

Boots and Boot Protectors, Terminals

WIRE SEPARATORS

Clamps, Loom Kits, Sleeving

WIRING TOOLS

Get The Job Done Like A Professional







SPARK PLUG & COIL WIRE REPAIR KITS

Easy Replacements For Damaged Wires

BULK SPARK PLUG WIRE

30 Foot Coils and 100 Foot Spools













IGNITION WIRES & BATTERY PRODUCTS

CABLE PRODUCTS







Follow Us

909-599-5955

440 E Arrow Hwy • San Dimas, CA 91773

www.pertronixbrands.com